



AN ISO 9001:2015 Certified Company

*# 5-24-1223/5/1, Ambedkar Nagar Gajularamaram, Gajularamaram, Near of UMCC Hospital ,
Qutuulapur Mandal R.R. Dist Hyderabad -500055 Telangana State India.*

Contact No:9652998932, 95501921831,

Email: sandhyaprises@gmail.com, sandhyarubber@gmail.com,

Website: www.sandhyafex.com, www.sandhyaenterprises.co.in

PVC NYLON BRAIDED PIPE

Make: "ELITEFLEX"

PVC Braided Hoses

PVC Braided Hoses made from high quality thermoplastic compound and reinforced (braided) with high tenacity synthetic yarn (crosswise - lengthwise). The excellent ply adhesion and bonding between the inner and upper layer of PVC ensures a durable pipe. The braiding gives the hose high strength and resistance to withstand high pressure and elongation. Our production of hoses meets the most stringent operational requirements.

Transparent hoses facilitate the location of blockage in use. The smooth inner bore prevents any build - up and offers minimum resistance to flow. The working pressure of the hose is dependent on temperature and is lowered with increase in temperature. Available in various grades as Clear Transparent, Super Spray (Car Washing), Agricultural Pesticide, Green Garden Water, Sanitary, Fire Fighting, Rock Drill, Welding etc.

Features: Withstand high pressure, Light weight compared to rubber hose, Clear transparent, Working temperature up to 60 o C, High flexibility, Long working life and durability, Chemical and abrasion resistance, Excellent ply adhesion, Crush and kink resistance, Opaque if required, Rodent proof




PVC YARN

BRAIDED

HOSE

SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES





SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES



i SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES




SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES



SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES



SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES

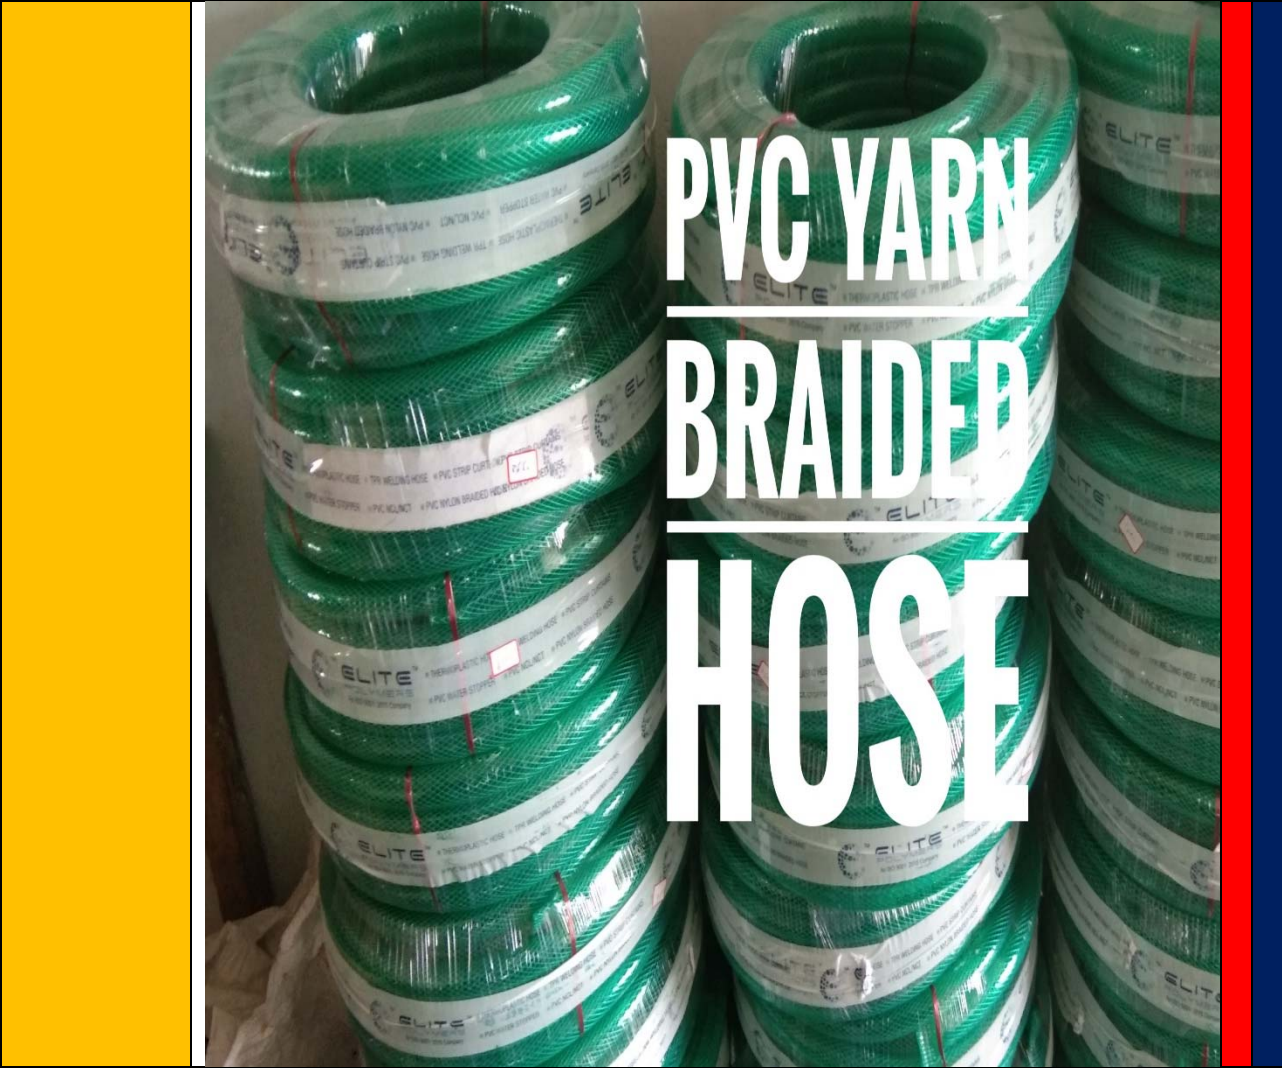

PVC YARN BRAIDED HOSE

SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES

PVC Braided Hoses

PVC Braided Hoses made from high quality thermoplastic compound and reinforced (braided) with high tenacity synthetic yarn (crosswise - lengthwise). The excellent ply adhesion and bonding between the inner and upper layer of PVC ensures a durable pipe. The braiding gives the hose high strength and resistance to withstand high pressure and elongation. Our production of hoses meets the most stringent operational requirements. Transparent hoses facilitate the location of blockage in use. The smooth inner bore prevents any build - up and offers minimum resistance to flow. The working pressure of the hose is dependent on temperature and is lowered with increase in temperature. Available in various grades as Clear Transparent, Super Spray (Car Washing), Agricultural Pesticide, Green Garden Water, Sanitary, Fire Fighting, Rock Drill, Welding etc.

Features: Withstand high pressure, Light weight compared to rubber hose, Clear transparent, Working temperature up to 60 o C, High flexibility, Long working life and durability, Chemical and abrasion resistance, Excellent ply adhesion, Crush and kink resistance, Opaque if required, Rodent proof

1	PVC Nylon Braided Pipe (REGULAR)
2	<i>6mm ID White Transparent Premium Quality, Working Pressure 20.0kg/cm2. Length-100Mtr/Roll</i>
3	<i>8mm ID White Transparent Premium Quality, Working Pressure 20.0kg/cm2. Length-100Mtr/Roll</i>
4	<i>10mm ID White Transparent Premium Quality, Working Pressure 14.0kg/cm2. Length-100Mtr/Roll</i>
5	<i>12mm ID White Transparent Premium Quality, Working Pressure 14.0kg/cm2. Length-100Mtr/Roll</i>
6	<i>16mm ID White Transparent Premium Quality, Working Pressure 10.0kg/cm2. Length-50Mtr/Roll</i>
7	<i>20mm ID White Transparent Premium Quality, Working Pressure 10.0kg/cm2. Length-150tr/Roll</i>
8	<i>25mm ID White Transparent Premium Quality, Working Pressure 10.0kg/cm2. Length-50Mtr/Roll</i>
9	<i>31mm ID White Transparent Premium Quality, Working Pressure 08.0kg/cm2. Length-30/50Mtr/Roll</i>
10	<i>40mm ID White Transparent Premium Quality, Working Pressure 08.0kg/cm2. Length-30/50Mtr/Roll</i>
11	<i>50mm ID White Transparent Premium Quality, Working Pressure 08.0kg/cm2. Length-30/50Mtr/Roll</i>